

Technical data sheet

Galvanised steel flat conductor for earth

Item number: 5019344



- Can be used as a conductor and earthing conductor according to DIN EN 62561-2 (VDE 0185-561-2)
- Complies with the requirements of VDE 0185-305 (IEC 62305)
- Zinc coating: $\geq 500 \text{ g/m}^2$ (approx. $70 \mu\text{m}$ in mean value)
- For lightning protection, earthing systems and ring equipotential bonding



St Steel

FT Hot-dip galvanised

Master data

| | |
|---------------------|--------------------|
| Item number | 5019344 |
| Type | 5052 DIN 30X3 |
| Description 1 | Steel strip |
| Description 2 | 50 kg ring |
| Manufacturer | OBO |
| Dimension | 30x3mm |
| Material | Steel |
| Surface | Hot-dip galvanised |
| Surface standard | DIN EN ISO 1461 |
| Smallest sales unit | 71 |
| Unit of quantity | Metre |
| Weight | 70.65 kg |
| Weight unit | kg/100 m |


Technical data sheet

Galvanised steel flat conductor for earth

Item number: 5019344



Dimensions

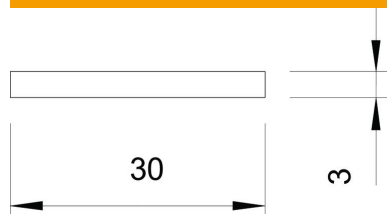

| | |
|-------------|-------|
| Width | 30 mm |
| Height | 3 mm |
| Dimension B | 30 mm |
| Dimension H | 3 mm |

Technical data

| | |
|-------------------------|--------------------|
| Normal ring (ca. kg) | 50 |
| Normal ring (approx. m) | 71 |
| Length tolerance \pm | 5 % |
| Cross-section | 90 mm ² |