

Technical data sheet

Multipurpose anchor

Item number: 2348120



Also suitable as a cavity anchor, with collar to prevent slipping. 3 tabs take up the torque.

Required minimum screw length = anchor length + component thickness + 1 x screw Ø.

Withdrawal force applies to wood screws of the largest bolt diameter in concrete of class B25.

Our safety value recommendation: 5x




PA Polyamide

Master data

| | |
|---------------------|--------------------|
| Item number | 2348120 |
| Description 1 | All-purpose anchor |
| Available from | 01.05.2020 |
| Manufacturer | OBO |
| Dimension | 5x31 |
| Colour | Light grey |
| Material | Polyamide |
| Smallest sales unit | 100 |
| Unit of quantity | Piece |
| Weight | 0.036 kg |
| Weight unit | kg/100 pc. |

Dimensions

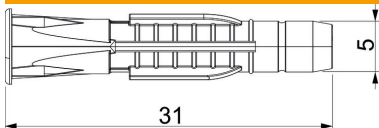

| | |
|-------------|-------|
| Length | 30 mm |
| Dimension D | 5 mm |
| Dimension L | 31 mm |

Technical data sheet

Multipurpose anchor

Item number: 2348120



Technical data

| Version for | Universal anchor |
|--|------------------|
| Concrete Frat | 160 |
| Drill hole diameter, min. | 5 mm |
| Suitable for fastening with cable ties | no |
| Suitable for gas concrete | no |
| Suitable for screw diameter, max. | 4 mm |
| Suitable for hexagonal wood screw | yes |
| Plasterboard 12.5 mm Fempf. | 70 |
| Hollow brick Hlz12 Frat | 210 |
| Wood screws | 3-4 |
| Porous calcareous sandstone KSL12 Fempf. | 170 |
| Solid calcareous sandstone KSL12 Frat | 170 |
| With edge | yes |
| With bolts | no |
| Porous concrete P2 Fempf. | 30 |
| Full brick Mz12 Frat | 160 |