

Technical data sheet

UP Flush-mounted device box 46, with nail straps

Item number: 2003714



Flush-mounted device box with nail straps, for use in masonry with an installation depth of at least 46 mm.

- 4 x 3 screw domes
 - Connector with bayonet lock, couplable on both sides
 - 6 combination pipe insertions of Ø 20 and 25 mm
 - 1 entry up to Ø 20 mm in the base
- Tested according to DIN EN 60670-1, DIN EN 60670-22 and DIN 49073-1.



PP Polypropylene

Master data

| | |
|---------------------|-----------------------------|
| Item number | 2003714 |
| Type | UG 46-NL |
| Description 1 | UP Flush-mounted device box |
| Description 2 | with nail straps |
| Available from | 01.10.2021 |
| Manufacturer | OBO |
| Dimension | Ø60mm, H46mm |
| Colour | Jet black |
| Material | Polypropylene |
| Smallest sales unit | 25 |
| Unit of quantity | Piece |
| Weight | 2.2 kg |
| Weight unit | kg/100 pc. |



Technical data sheet

UP Flush-mounted device box 46, with nail straps

Item number: 2003714



Dimensions

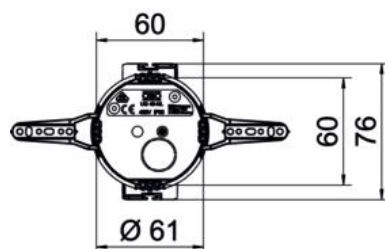

| | |
|--------|-------|
| Height | 46 mm |
|--------|-------|

Technical data

| | |
|----------------------------------|---|
| No. of entries | 7 |
| Type of insertion... | NYM cables, data cables and corrugated pipes |
| Type of housing penetration | Break-out opening |
| Version for | Single |
| Type | Accessory socket |
| Device fixing | Screws or spreading claws |
| Cover | Without |
| Cover fastening | Screws , |
| Entry from rear | yes |
| Flame-resistant | acc. to VDE 0471/IEC 60695-2-11, test temperature 650°C |
| Shape | Round |
| for pipe diameter | 20/25 mm |
| Halogen-free | yes |
| Combination entries Ø 20 / 25 mm | 6 |
| With nail strap | yes |
| With bolts | no |
| Nominal cross-section, max. | 2.5 mm ² |
| Nominal cross-section, min. | 1.5 mm ² |
| Pipe entries Ø 20 mm | 1 |
| Impact-resistant | yes |
| Protection rating | IP30 |
| Airtight | no |
| Rated voltage | 400 V |